T. 2 S. R. 10 E. Z.M.

COUNTY OF BLISS

NOTE: The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this map.

PROFESSIONAL LAND SURVEYOR

DATE

PROFESSIONAL LAND SURVEYOR — No. — Exp. — STATE OF CALIFORNIA

FOUND MONUMENTS

M1 FOUND ¼ CORNER SEC 23/SEC24, 2" IRON PIPE WITH YELLOW PLUG "CALTRANS" IN WELL PER ROS 12-5, BLISS COUNTY RECORDS (N 10000.00, E 10000.00)

M2 FOUND NORTH SEC CORNER SEC 23 /SEC 24, ⅝" REBAR PER CORNER RECORD #123, BLISS COUNTY RECORDS (N 12601.37, E 10000.00)

CURVE DATA TABLE			
NO.	RADIUS	DELTA	LENGTH
C1	10000.00	0°21'23"	62.21
C2	10040.00	0°21'18"	62.19
C3	951.39	16°19'10"	270.98
C4	634.45	1°58'02"	21.78
C5	614.45	1°30'46"	16.22
C6	10440.00	0°20'58"	63.65
C7	634.45	13°40'32"	151.43
C8	1454.53	15°44'27"	399.60

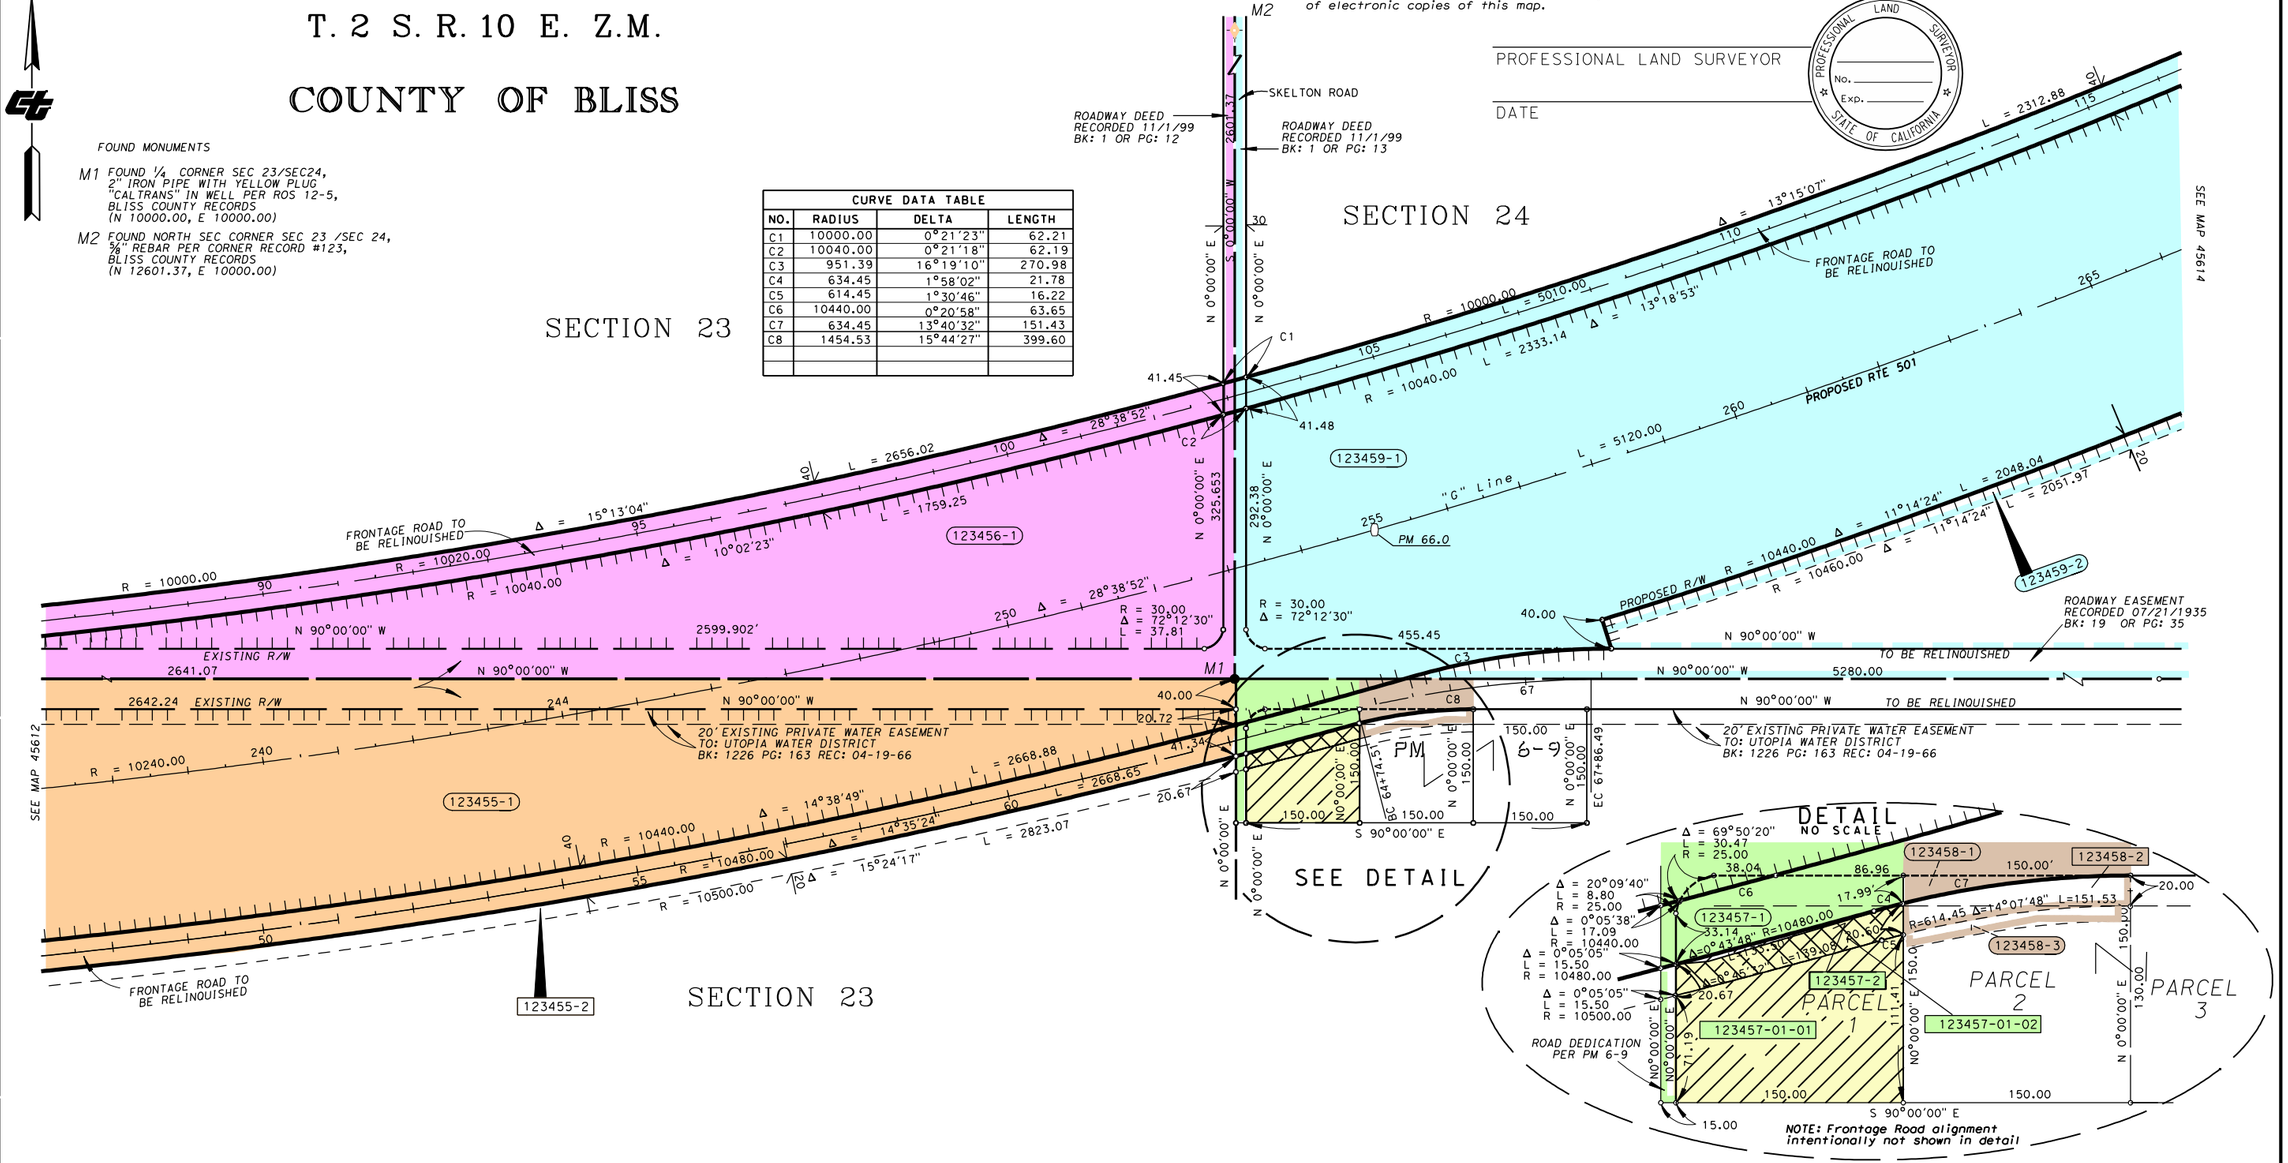

PARCEL#	TITLE CODE ②	GRANTOR	AREAS (square feet or as noted) TOTAL	REQUIRED ① [UF]	EXCESS ① [UF]	REMAINDER	REMARKS	RECORDATION TYPE ③	DATE	DOC.# ④
123455-1	F	R. KRAMDEN, ET UX	75.94 AC	17.47 AC [2.43]		58.47 AC		GD	4/1/07	2007-123456
123455-2	E	R. KRAMDEN, ET UX	75.94 AC	1.23 AC			WATER DELIVERY ESMT TO UTOPIA WATER DISTRICT	ED	4/1/07	2007-123457
123456-1	F	ADDAMS FAMILY TRUST	151.88 AC	6.99 AC [2.5]		144.89 AC		GD	3/15/07	2007-123454
123457-1	F	BERNARD A. FIFE	0.51 AC	1.3 AC [0.18]	0.39 AC	0.39 AC	TOTAL TAKE	GD	2/14/07	2007-123443
123457-2	E	BERNARD A. FIFE	0.51 AC	3105.85 [310.0]			WATER DELIVERY ESMT TO UTOPIA WATER DISTRICT	ED	2/14/07	2007-123444
123458-1	F	CAIN AND ABEL INC	1.02 AC	8941.77 [0.14]		0.97 AC		GD	1/21/07	2007-123342
123458-2	E	CAIN AND ABEL INC	1.02 AC	3029.66			WATER DELIVERY ESMT TO UTOPIA WATER DISTRICT	ED	1/21/07	2007-123343
123458-3	T	CAIN AND ABEL INC	1.02 AC	1515.57			TCE TO CONSTRUCT WATER DELIVERY ENDS 2010	ED	1/21/07	2007-123344
123459-1	F	MARGARET KETTLE, ET VIR	LARGE	22.02 AC [0.58]		LARGE		GD	5/15/07	2007-123554
123459-2	E	MARGARET KETTLE, ET VIR	LARGE	0.94 AC		LARGE	DRAINAGE EASEMENT	GD	5/15/07	2007-123554
~~123457-01-02~~	~~E~~	~~STATE OF CALIFORNIA~~	~~3829.66~~				~~DEED TO UTOPIA WATER DISTRICT~~	~~QD~~	~~8/01/07~~	~~2007-123621~~
~~123457-01-01~~	~~F~~	~~STATE OF CALIFORNIA~~	~~0.87 AC~~				~~DEED TO CAIN AND ABEL INC~~	~~QD~~	~~8/29/07~~	~~2007-123684~~

GRANTOR NOTES

① Areas shown exclude underlying fee in the adjoining public way. Acreages
[ ] Indicates Underlying Fee (UF) Area
[Y] Indicates Indeterminate UF
② TITLE CODES:
A=Access Rights Only
F=Fee
E=Easement (Ease)
TCE=Temp Construction Ease
T=Other Temp Ease (see Remarks)
O=Other (see Remarks)
③ TYPE:
GD=Grant deed
ED=Easement deed
QC=Quitclaim
DD=Director's deed
DE=Director's easement deed
DK=Director's quitclaim deed
FOC=Final Order of Condemnation
HE=Highway easement deed
REL=Relinquishment
VAC=Vacation
JUA=Joint use agreement
CCUA=Consent to common use agreement
④ Document or Instrument number

NOTES

Coordinates and bearings are on CCS 1983(1991.35) Zone 9. Distances and stationing are grid distances. Divide by 0.9999999 to obtain ground distances.
All distances are in feet unless otherwise noted.

LEGEND

- Access Prohibited
- Access Superseded
- Existing R/W Superseded
- Access Opening (Private)
- Indicates Radial Bearing
- Indicates Found Monument as noted
- Indicates calculated point. (Does not imply monument set)
- Title to State
- Required for Others

STATE OF CALIFORNIA
BUSINESS, TRANSPORTATION AND HOUSING AGENCY
DEPARTMENT OF TRANSPORTATION

RIGHT OF WAY RECORD MAP MAP NO. DRAFT

FOR PREVIOUS R/W INFORMATION SEE MAP(S) 45613

FEET 0 50 100 200 300

TO DESIGN: 06/14/07 EA(s): 123452 FA#:

DISTRICT	COUNTY	ROUTE	SHEET PM	SHEET NO.	TOTAL SHEETS
20	BLI	501	66.0	3	5

R/W PROJECT SURVEYOR:

DATE	REVISIONS	BY
09-15-07	ADDED HATCHING FOR DD	XYZ

DATE	REVISIONS	BY